

# **Press Load Cell**

for hand and automatic operated presses

# MODEL 8451



#### Measuring ranges 0 ... 50 kN up to 0 ... 100 kN





Measuring ranges up to 0 ... 2 kN

Measuring ranges 0  $\dots$  5 kN up to 0  $\dots$  20 kN

#### Highlights

- Measuring ranges from 0 ... 500 N up to 0 ... 100 kN
- Non-linearity < 0,25 % F.S.
- Protection class IP65 / IP67
- Simplest mounting on press ram
- Robust construction with mechanical overload protection

#### Applications

- Forces in component joining
- Press-fitting
- Bending forces during material deformation
- Cutting forces when severing materia
- Forces during stamping processes
- Punching forces for blanks
- Break-out forces used in destructive testing

#### **Product description**

The Load cell model 8451 has been developed for measuring the forces that occur during press operation. The internal measuring elements have a rugged design, which mean they can cope reliably with the steep force curves that are typical of press applications. They can be fitted or replaced quickly and easily on the press ram without the need for additional components around them. The force sensor is placed between the tool and the press ram and can thus measure the actual compression force directly in the axis of operation.


The load cell measures the compression forces between the circular contact surfaces of plunger and tool. The pin on its top side and hole on its lower face are simply provided for mechanical fixing and centering the components correctly. The connecting cables are suitable for drag chains, designed for many movements and stably fastened in the sensor housing. Attachments are available which clamp onto the press sensors to enable easy mounting of displacement sensors according to the circumstances of use.

# **Technical Data**


8451	_	5500	6001	6002	6005	6010	6020	6050	6100					
Measuring range		500 N	1 kN	2 kN	5 kN	10 kN	20 kN	50 kN	100 kN					
calibrated in N and kN from 0		±112.4 lbs	±225 lbs	±450 lbs	±1.1 klbs	±2.25 klbs	±4.5 klbs	±11.25 klbs	±22.5 klbs					
Accuracy														
Relative non-linearity*		<u> </u>	5.											
Characteristic curve deviation*			$\leq \pm 0.5$ % F.S.											
Relative hysteresis		≤ 0.75 % F.S.		≤ 0.50 % F.S		≤ 0.75 % F.S.	$\leq$ 0.50 % F.S.							
Temperature effect on zero output		≤	0.02 % F.S./	K	≤ 0.1 % F.S./K	≤ 0.05 % F.S./K	<	≤ 0.03 % F.S./K						
Temperature effect on nominal sensitivity		≤	0.02 % F.S./	K	≤ 0.1 % F.S./K	≤ 0.05 % F.S./K	<	≤ 0.03 % F.S./	к					
Electrical value														
Sensitivity nominal			1.5 mV/V		-	0.7 mV/V	1.5 mV/V	1.0 mV/V	1.2 mV/V					
Measurement direction					Compressio	on direction								
Standardization**		option	option 0.8 mV/V (±0.25 %) not possible option 0.8 mV/V (±0.25 %)											
Bridge resistance		350 $\Omega$ nominal (deviations are possible)												
Excitation					-	ix. 10 V DC)								
Insulation resistance	sulation resistance $> 30 \text{ M}\Omega$ at 45 V													
Environmental condi	tions													
Nominal temperature range					+15 °C .	+70 °C								
Operating temperature range					-20 °C	. +80 °C								
Mechanical values														
Deflection full scale [µm]		< 50												
Maximum operating force			120 9	% of nominal	load (after tha	t overload pro	otection takes	effect)						
Max. static load capacity		2.5 kN	5 kN	75 kN	150 kN									
Dynamic performance					recommen	ded: 70 %								
Material			stainless steel 1.4542											
Protection class (EN 60529)			IP65											
Geometry		5500	6001	6002	6005	6010	6020	6050	6100					
					see dimensio	onal drawing								
Mounting														
Mounting fixing pin diameter	[mm]			Øl	0 e7		Ø 20 e7							
Mounting receiving hole diameter	[mm]	Ø 10 H7 Ø 1							) H7					
Clamping screws for tool pin			N	M8										
Mounting instructions	ng instructions Force transmission between the circular contact surfaces (press ram/press tool). The pin and hole are used only for mechanical fastening and centric alignment (see dimension								al drawing).					
Other														
Natural frequency	[kHz]	> 2	> 3	> 5										
Mass	[g]		500		220 900									
General tolerance of dimension					ISO 2	2768f								

 $^{\star}~$  The data in the area 20 % - 100 % of rated load


\*\* Realized on board in connection cable, 1.7 m from sensor housing or 0.3 m from cable end (temperature range for the optional TEDS or standardization board 0 ... 60 °C)

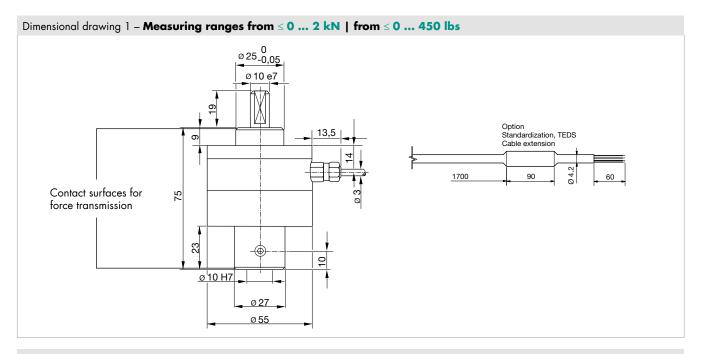

Dimensional drawing 2 – Measuring ranges from  $\ge$  0 ... 5 kN up to  $\le$  0 ... 20 kN | from  $\ge$  0 ... 1.1 klbs up to  $\le$  0 ... 4.5 klbs

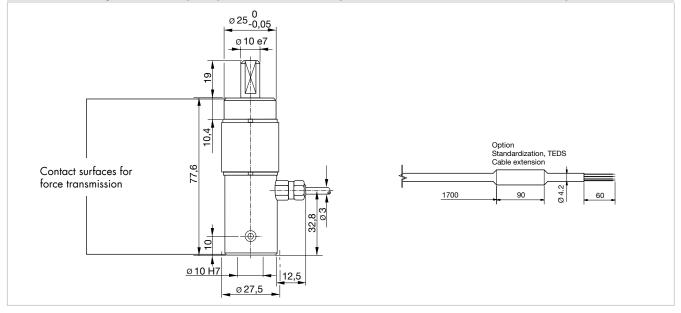



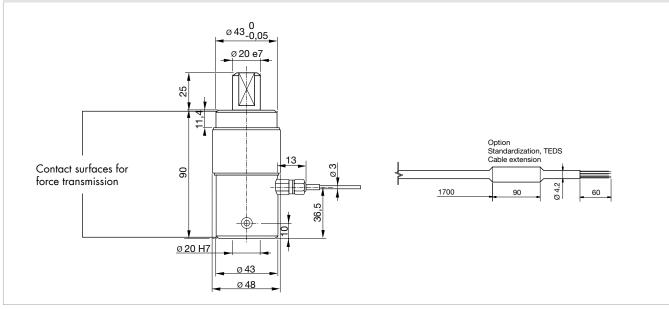


### **Electrical termination**

#### **Output signal**

burster load cells are based on a strain-gage Wheatstone bridge. This measurement principle means that the output voltage mV/V is highly dependent on the sensor supply voltage. Our website contains details of suitable instrumentation amplifiers, indicator and display devices and process instruments.



The "**burster T**ransducer **E**lectronic **D**ata **S**heet" (TEDS) is a memory in which identification data of the sensor, calibration data and other sensor parameters are saved. In conjunction with your own suitable burster device, there is the option of performing a simple adjustment in order to achieve the maximum accuracy of the measuring chain. A simple sensor exchange is thus possible in just a few steps without losing precision.

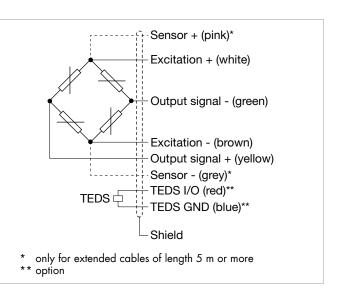


8451 -		5500	6001	6002	6005	6010	6020	6050	6100			
Measuring range from 0		500 N	1 kN	2 kN	5 kN	10 kN	20 kN	50 kN	100 kN			
Electrical termination												
Specifications	Specifications 1.7 m, shielded, highly flexible, suitable for drag chains and robots, oil resistant Bending radius > 9 mm with fixed cable 30 mm with moving cable											
Cable model	le model PUR, Ø 3 mm, 4 x cable core 0.056 mm²											

# Options

#### **Ball guide:**

Radial backlash-free design due to ball guide inserted in the load cell for measuring ranges from 0  $\dots$  500 N to 0  $\dots$  2 kN

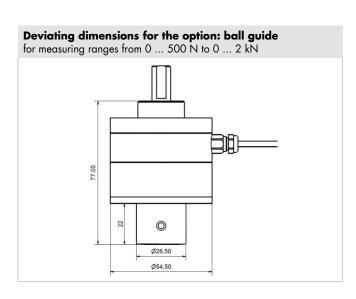



### Accessories

#### **Connectors and units**

Order code	
Connectors	
9941	Connectors 12 pin, suitable to all burster desktop units
9900-V209	Connectors 9 pin, suitable to SENSORMASTER, DIGIFORCE® and TRANS CAL
9900-V229	Connectors 9 pin with TEDS
9900-V245	Connectors 8 pin, suitable to ForceMaster
Units	
9110	ForceMaster 9110 - Monitoring for hand presses
9311/9307	DIGIFORCE® - Monitoring for hand presses + force and displacement monitoring
refer to section 9	Sensor electronics, amplifier and process control units like digital indicator model 9180, model 9163, modular amplifier model 9250

### **Examples**

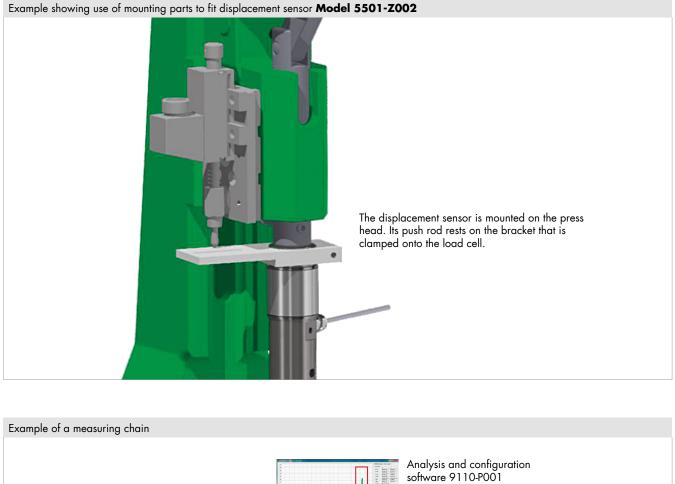

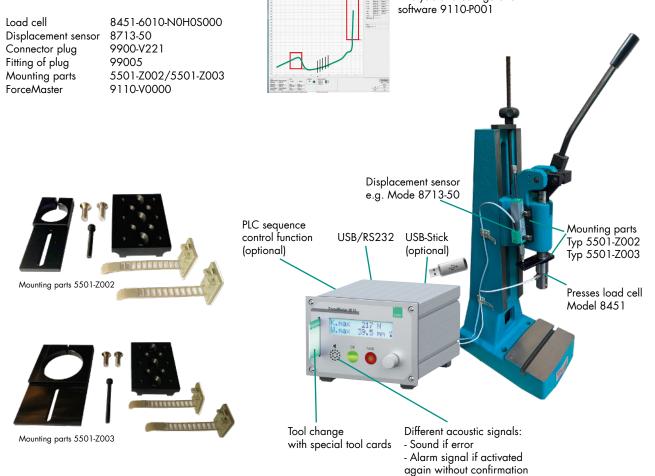

burster Sensors and Process Instruments – Technical changes reserved. All data sheets at www.burster.com

# Calibration

Test and calibration cert	tificate
Supplied with the sensor	Amongst other data, includes figures for zero point, full-scale output and calibration offset
Standard factory calibre	ation certificate for load cells or measurement chains (WKS)
Optionally available	Our standard factory calibration is performed in 20% steps starting from zero until the reaching the nominal force, for increasing and decreasing load with unchanged installation position. Factory calibration is performed in the compression direction.
Special factory calibrati	on certificate for load cells or measurement chains (WKS)
On request	We are happy to calibrate sensors and measurement chains to the customer's specification.
Calibration certificate w	rith accreditation symbol for product group load cell 8451
Optionally available	Calibration certificate with accreditation symbol for load cells 8451. Calibration is performed on the basis of the accreditation of the calibration laboratory D-K-15141-01-00, for the scope of accreditation listed in the annex to the certificate. The traceability to national standards as well as a wide international recognition (DAkkS as signatory of the Multilateral Agreements of EA, ILAC and IAF) are thus guaranteed. Calibration is performed according to ISO 376 in 10 force steps (10% steps) vstarting from zero until the reaching the nominal force, for increasing and decreasing load under various installation positions.



### Order Code

Measuring range Code							Meas	uring I	range													
							0		112.4													
0 1 kN					6	0	0	1	0	225	lbs											
0 2 kN						6	0	0	2	0	450	lbs										
0 5 kN						6	0	0	5	0	1.1	klbs										
	0	1	0 k	٨N		6	0	1	0	0	2.23	5 klbs										
		2				6	0	2	0	0		klbs										
	0	5	0 k	٨N		6	0	5	0	0	11.23	5 klbs										
	0	10	0 k	٨N		6	1	0	0	0	22.5	klbs	_									
						1			1													
													Delivery ex stock at short notice									
											Ν	0	0	0	S	0	0	0				
8	4	5		1	-					-				0	S		0	0				
Nor	ninal se	ensitivi	ity/r	not stan	dardize	d					Ν											
-				).8 mV/							Р											
(not	possib	e for	mec	asuring	ranges (	0 5 k	N and (	) 10 k	kN)		В	1										
					th stand	ardizati	on in th	e cable	2 m)			0										
	inectior											С										
	nectior											F										
	inectior											G										
				m exter								L										
					nded * (							Μ										
* shorter	ned delive	ery time	com	pared wit	h cable ler	ngth 3 m c	ind 5 m in	one piece														
	en cabl	e end	s + (	6 cm si	ngle wir	es							0									
					del 990								В									
9 pi	ns Sub-	D cor	nnec	ctor mo	del 990	0-V209	for 916	3-V3xxx	x				Е									
	12 pins round connector model 9941 for burster desktop devices										F											
8 pins coupling connector model 9900-V245 with sensor datas for 9110-Vxxxx									Н		:											
9 pi	9 pins Sub-D connector with burster TEDS model 9900-V229											Т										
	Non-linearity $\leq \pm 0.25$ % F.S. up to $\leq \pm 0.35$ % F.S. **												S									
** The data in the area 20 % - 100 % of rated load F																						
Ball	guide l	or me	easu	iring rai	nges fro	m 0	500 N i	up to 0 .	2 kN							6						
Nor	■ Nominal temperature range +15 °C +70 °C 0												0									

### Note

#### Brochure

Our brochure **"Load cells for production, automation, R&D and quality assurance"** is available for download on our website. It conatains numerous applications, detailed product specifications and overviews.

#### Product videos

Watch our How-to-do video at: www.youtube.com/bursterVideo

You Tube



#### CAD data

Download via www.burster.com or directly at www.traceparts.com